


DCSM 1" Mini Batten Standing Seam

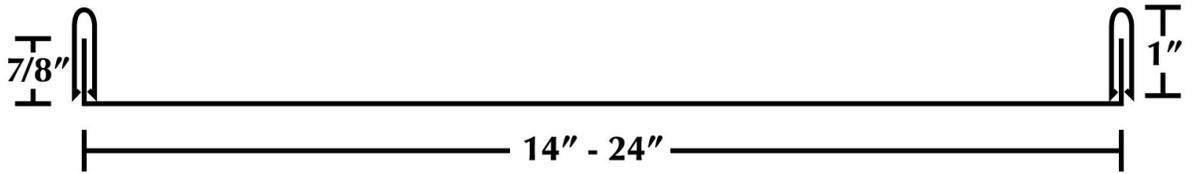

DCSM offers a variety of mechanical and snap-lock profiles including radius, domes, convex and concave as well as many architectural structures. Available in a variety of colors.

- Application:** Architectural, Residential and Commercial panels.
- Radius Application:** Panels and battens can be formed for installation on curved substrates, convex or concave.
- Coverage:** Panels are available in various widths ranging from 14" to 24", with pan and batten seam height of 1".
- Minimum Slope:** Recommended slope 2/12 or greater.
- Substrate:** Recommended substrate 1/2" - 5/8" plywood with a minimum 30 lb. underlayment.
- Length:** Panels are continuous lengths from eave to ridge.
- Fastening System:** Concealed clip and fastener system. Recommended 2 screws per clip with a clip spacing of **12"** o/c or **16"** o/c.
- Fasteners:** #10 x 1" flat head screws.
- Materials:** Panels are fabricated from **24** gauge Galvalume*, **.032** Aluminum, or **16 oz.** Copper.
- Coatings & Finishes:** **24** gauge Galvalume* and **.032** Aluminum pre-painted panels are available in a variety of colors and coated with a full-strength Kynar 500 finish.
- Warranty:** **20, 25,** and **35** year manufacturer warranties available.
- Approvals & Testing:** Class A Fire Rating (UL-790). Quality Assurance Program.

At DCSM, all flashings and accessories are fabricated from the same coil stock as the panels

* All DCSM products are made from **Galvalume** not galvanized. Galvalume offers far superior corrosion resistance for the same price. Contact us for more product information.

For More Information:



239.594.0530



info@dcsm.net



Visit us online!

DCSM, Inc. | 5700 Washington St | Naples, FL 34109 | P: 239.594.0530 | W: www.DCSM.net | E: info@dcsm.net