
## DCSM 5V Crimp

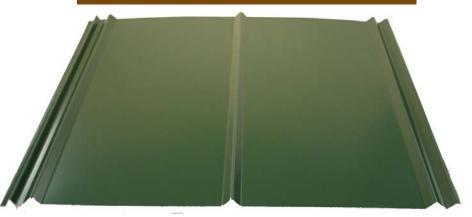

DCSM 5-V crimp is an exposed fastener, 5-rib panel available in many colors, Galvalume, aluminum and copper. DCSM also offers 5-V in all inclusive packages which includes all standard flashings and components in one per square price.

**Application** Residential, Commercial, Industrial, and Agricultural. 23.5" panel coverage, with a 1/2" seam height Coverage

Minimum Slope Recommended slope 2/12 or greater

**Substrate** Recommended substrate 1/2"-5/8" plywood with a minimum 30 lb.

felt moisture barrier underlayment.

Length Panels are continuous lengths from eave to ridge with no horizontal

laps.

Fastening System Exposed fastening system. Recommended that panels are fastened

to substrate at center rib and inside rib of side lap, with a maximum

spacing of 16" o/c.

**Fasteners** 1 1/2" self-sealing neoprene washer screws

Materials Panels are fabricated from 26 gauge or 24 gauge Galvalume\* Also

available in Aluminum and Copper.

Coatings & Finishes -26 gauge pre-painted Galvalume\* panels are available in over 10

standard colors.

**-24** gauge pre-painted Galvalume\* panels are available in over 30 standard colors and coated with a full-strength Kynar 500\*\* finish.

Warranty 25, and 35 year manufacturer warranties available

Approvals & Testing - Florida Building Code and Miami-Dade HVHZ product approvals

- TAS 125 (UL-580 uplift resistance test)

- TAS 100-95 (wind driven rain test)

- Class A Fire Rating (UL-790)

Quality Assurance Program

## At DCSM, all flashings and accessories are fabricated from the same coil stock as the panels

\* All DCSM products are made from **Galvalume** not galvanized. Galvalume offers far superior corrosion resistance for the same price. Contact us for more product information.

Visit us online!

## **For More Information:**



239.594.0530

