


D.C.S.M. Ridge Vents for Metal Roof Systems

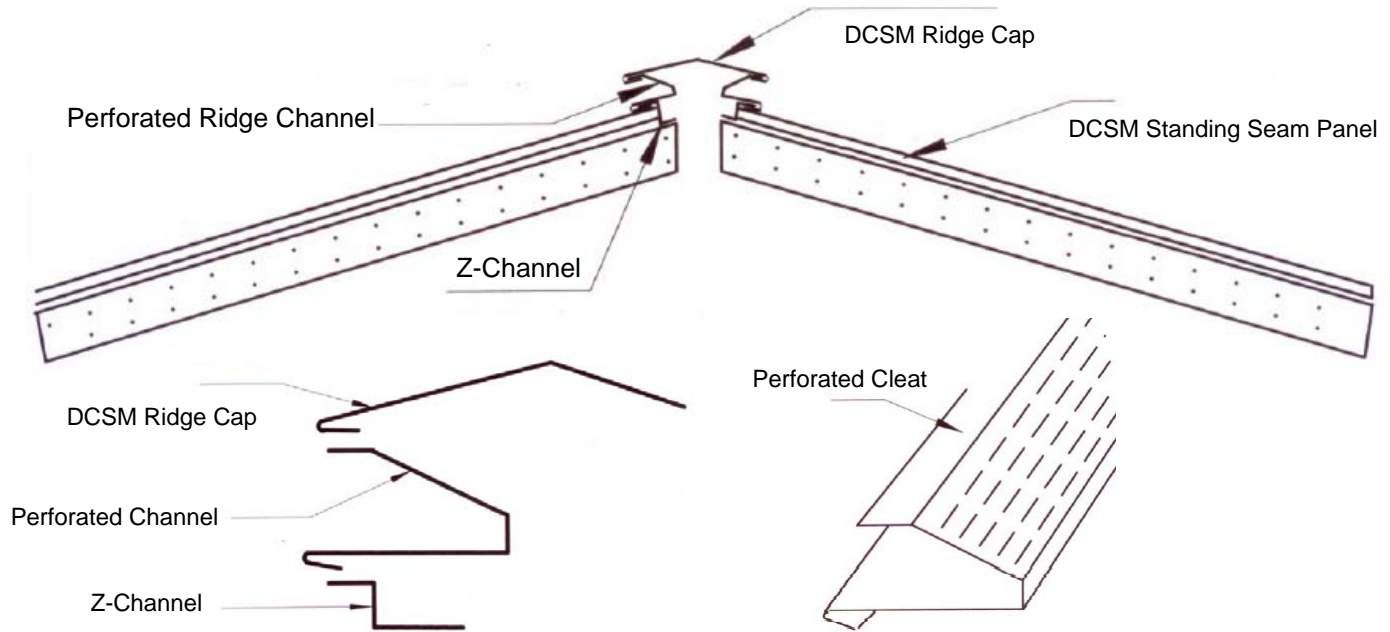

General Information

- Application:** Residential, Commercial, Industrial, and Agricultural.
- Profiles:** Available in 5V Crimp and Standing Seam profiles
- Length:** Continuous length of ridge or 10' lengths.
- Materials:** Fabricated from 26 gauge or 24 gauge Galvalume*. Also available in aluminum, 16oz copper, metallic finish, or acrylic coated Galvalume.
- Colors:** Available in all DCSM standard Colors. Roof panels and accessories are fabricated from the same coil stock as the ridge vent.
- Finishes:** Full strength Kynar 500† finish.
- Warranty:** 25, 30, and 35 year paint warranties available.
- Approvals:** Energy Star approved / UL Rated

Additional Information

* **Galvalume** sheet uses an aluminum (55%) - zinc (45%) alloy coating that offers greater corrosive resistance, higher temperature oxidation resistance, and higher heat reflectivity than standard galvanized steel.

† **Kynar 500** is a premium fluorocarbon coating with full strength Kynar 500 resin. This affords maximum exterior