


DCSM R-Panel

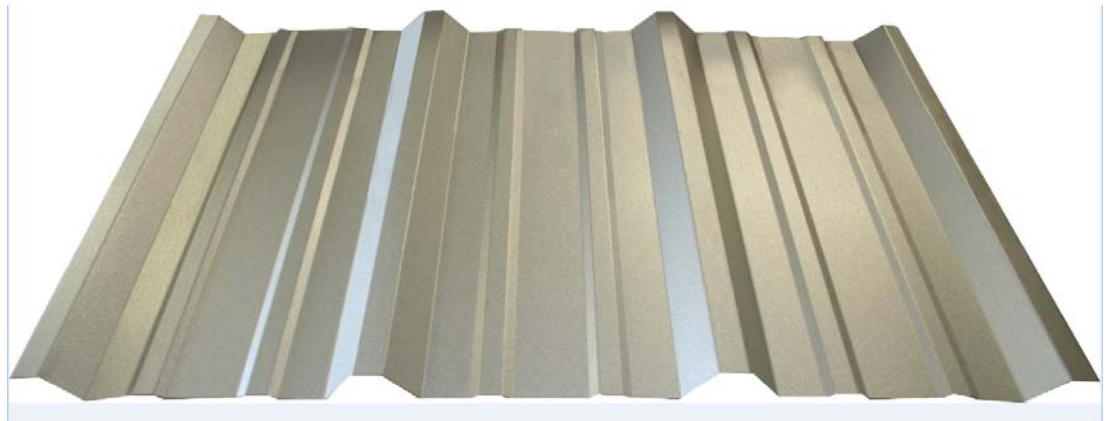

- Application:** Residential, Commercial, Industrial, and Agricultural.
- Coverage:** 36" panel coverage, with a 1-1/4" seam height
- Minimum Slope:** Recommended slope 2/12 or greater
- Substrate:** **Non-Structural:** 1/2"-5/8" plywood with a 30 lb. felt moisture barrier underlayment.
Structural: Minimum 16 gauge steel purlin / girt.
- Length:** Panels are continuous lengths from eave to ridge
- Fastening System:** Exposed fastening system. Recommended that panels are fastened to substrate according to manufacturer specifications.
- Non-Structural** (maximum): Field 16" o/c / Eaves 6" o/c / Gable ends 8" o/c.
Structural (maximum): Row spacing 60" o/c / Side laps 12" o/c.
- Fasteners:** Self-sealing neoprene washer screws (refer to manufacturer's specifications).
- Materials:** Panels are fabricated from 26 gauge or 24 gauge **Galvalume*** Also available in Aluminum and Copper.
- Coatings & Finishes:** -**26** gauge pre-painted Galvalume* panels are available in over 10 standard colors.
-**24** gauge pre-painted Galvalume* panels are available in over 30 standard colors and coated with a full-strength Kynar 500** finish
- Warranty:** 25 and 35 year manufacturer warranties available
- Approvals & Testing:** - Florida Building Code and Miami-Dade HVHZ product approvals
- TAS 125 (UL-580 uplift resistance test)
- TAS 100-95 (wind driven rain test)
- Class A Fire Rating (UL-790).
- ASTM E 1592-01.

* All DCSM products are made from **Galvalume** not galvanized. Galvalume offers far superior corrosion resistance for the same price. Contact us for more product information.

For More Information:



239.594.0530



info@dcsm.net



Visit us online!

DCSM, Inc. | 5700 Washington St | Naples, FL 34109 | P: 239.594.0530 | W: www.DCSM.net | E: info@dcsm.net

All accessories fabricated in same coil stock!

This correspondence is intended for companies that have Established Business Relationship with D.C.S.M. Inc. If you have received this fax in error please call toll-free at 866-989-3276 to be removed from our database. Thank you.