


DCSM Ridge Anchor

Inverted Design!

DCSM now offers 2 different profiles of Ridge Anchor. Our standard profile and the Inverted profile (see below).

The *inverted* channel helps to hold the adhesive or foam in place for all three applications.

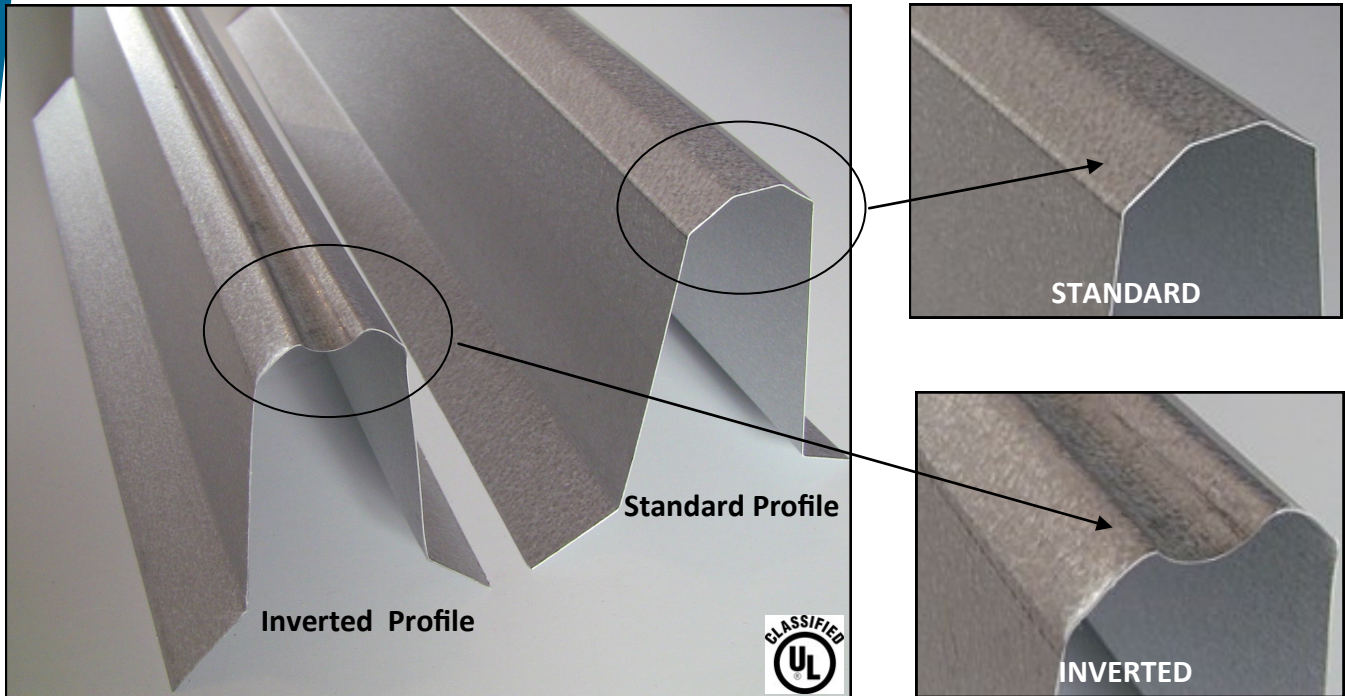

SPECIFICATIONS:

- **Application:**
 - RT600 adhesive with screw
 - Foam (1 or 2 part) with screw
 - Foam or adhesive with no screw
- **Materials:**
 - 26 gauge mill finish *Galvalume in 10' lengths
 - Other lengths available upon request
- **Sizes:**
 - Available in 5 standard sizes of 4", 5", 6", 7" or 8" for various tile profiles.
 - See our website for recommended sizes and profiles.
- **Product Approval:**
 - FBC product approval #FL-6046
 - FBC HVHZ approval # FL-8380
 - Quality Assurance Program
- **Fasteners:**
 - 1 1/2" self-sealing neoprene washer screws spaced 16" o/c.
 - Approved ring shank nails spaced 6" o/c., roof cement and membrane
- Available in all DCSM standard colors

* All DCSM products are made from **Galvalume** not galvanized. Galvalume offers far superior corrosion resistance for the same price. Contact us for more product information.

For More Information:



239.594.0530



info@dcsm.net



Visit us online!

DCSM, Inc. | 5700 Washington St | Naples, FL 34109 | P: 239.594.0530 | W: www.DCSM.net | E: info@dcsm.net

Inverted design makes hip & ridge installation easier!

This correspondence is intended for companies that have Established Business Relationship with D.C.S.M. Inc. If you have received this fax in error please call toll-free at 866-989-3276 to be removed from our database. Thank you.